

EVERGLADES NATIONAL PARK

Statement of Work (SOW):

Service/Maintenance Contract:

Custodial and Landscaping Services; Heating,
Ventilation, and Air Conditioning (HVAC) and Elevator
Inspection, Testing, and Maintenance:

Marjory Stoneman Douglas Visitor Contact Site
Everglades City, Florida

PMIS: 353817

DATED:
March 2026



NATIONAL PARK SERVICE
Interior Region 2: South Atlantic/Gulf
Major Acquisition Buying Office

STATEMENT OF WORK (SOW) FORMAT

1. Background
2. Objectives
3. Place of Performance
4. Period of Performance
5. Hours of Operation
6. Prework Conference
7. Contractor Representative
8. Personnel
9. General Scope
10. General Tasks
11. Deliverables
12. Government Furnished Property and Facilities
13. Contractor Furnished Property
14. Technical Specifications
15. Performance Requirements Standards
16. Inspection procedures
17. Acceptance
18. Safety
19. Fire Prevention and Conservation of Utilities
20. Security
21. Circumstances to be reported
22. Lost and Found Property
23. Unforeseen Building Closures
24. Subcontracting
25. Travel
26. Special Material and Other Unique Requirements
27. Quality Assurance Requirement
28. Project Personnel

Appendix 1: Acceptable Quality Level (AQL)

Appendix 2: Maps and Floor Plans

Appendix 3: Work Locations and Proposed Quantities

Appendix 4: HVAC Inventory

1.0 BACKGROUND

The Marjory Stoneman Douglas Visitor Center is a newly constructed state-of-the-art visitor contact site located in the Northwest District of Everglades National Park in Everglades City, Florida. The facility requires landscape maintenance, custodial operations, and licensed Heating, Ventilation, and Air Conditioning (HVAC) system and elevator inspections, testing, and maintenance.

The National Park Service (NPS) is requesting to contract these duties out to a non-NPS contractor who would be responsible for completing these tasks. Services shall be provided in strict compliance with the terms, specifications, conditions, and provisions contained within this Statement of Work (SOW). The Government shall not exercise any supervision or control over the contract service providers performing the services herein. Such contract service providers shall be accountable solely to the Contractor who, in turn, shall be responsible to the Government.

2.0 OBJECTIVES

The NPS seeks to hire a contractor to provide supervision, labor, materials, tools, equipment, and transportation to maintain the site in a clean, sanitary, and acceptable condition, and to inspect, test, and maintain HVAC and elevator systems and sub-systems as outlined herein, except as specified herein as government furnished (see *Section 12: Government Furnished Property and Facilities*).

3.0 PLACE OF PERFORMANCE

The work will take place at the Marjory Stoneman Douglas Visitor Contact Site, located at 815 Oyster Bar Lane, Everglades City, Florida, 34139 (25.845024°, -81.386145°).

See Appendix 1: Maps.

The eleven (11)-acre Gulf Coast site includes a 4,600 square foot (SF) Visitor Center, a marina, a 2,496 SF kayak/canoe launch, a 1,420 linear-foot bulkhead, a natural shoreline, concession rental building, floating docks, two (2) parking lots for 108 vehicles, 3,300 SF of pedestrian walkways, outdoor seating (twenty [20]), 76,400 SF of concrete hardscape, and native landscaping.

The Visitor Center consists of approximately 292 square feet of carpeted floors, 1,590 square feet of luxury vinyl tile (LVT) floors, 1,264 square feet of epoxy floors, and 214 square feet of porcelain tile floors. On the second (main) floor, there are two (2) sets of exterior gender-neutral restrooms, one (1) interior gender-neutral employee restroom, an employee kitchen/breakroom, a conference room, a gift shop, and office space. On the ground floor, there is a women's restroom and a men's restroom, a family restroom, two (3) garbage receptacles, and a drinking fountain.

Both second floor exterior gender-neutral restrooms are tiled from the floor to the ceiling; each restroom has one (1) sink, one (1) toilet, one (1) baby changing table, mirrors, two (2) garbage receptacles, and (1) soap dispenser. The interior gender-neutral employee restroom has one (1) sink, one (1) toilet, a shower, mirrors, a garbage receptacle, and soap dispensers.

On the ground floor, the women's restroom has three (3) toilets, two (2) sinks, one (1) changing table, mirrors, garbage receptacles, and (1) soap dispenser. The men's restroom has one (1) toilet, two (2)

urinals, and two (2) sinks, garbage receptacles, mirrors, and (1) soap dispenser. The family restroom has one (1) toilet, one (1) sink, a baby changing table, mirrors, garbage receptacles, and a soap dispenser. All restrooms' floors and walls are finished in concrete. One (1) garbage receptacle near the picnic tables, one (1) by employee stairwell, one (1) by visitor benches and one (1) by restrooms/water fountain area are included in the scope of this contract.

4.0 PERIOD OF PERFORMANCE

All tasks and deliverables must begin no later than thirty (30) days from contract award. Days listed herein refer to calendar days. The performance period of this contract will be twelve (12) months for each year of the contract, September through August, each year for up to five (5) years, total – beginning during the work year 2026/2027 as the base year of the contract with additional option years through 2032. In addition to the initial base year pricing, at the time of bid, offerors shall include pricing for four (4) option years.

If there are any schedule delays due to lead time of labor, materials, tools, equipment, or transportation, the COR should be notified immediately.

Contract Periods:

Base Year: 09/01/2026 to 08/31/2027

Option Year One (1): 09/01/2027 to 08/31/2028

Option Year Two (2): 09/01/2028 to 08/31/2029

Option Year Three (3): 09/01/2030 to 08/31/2031

Option Year Four (4): 09/01/2031 to 08/31/2032

5.0 HOURS OF OPERATION

The facility is open to visitation from 9:00 AM to 5:00 PM (Eastern Standard Time [EST]), seven (7) days per week.

The Contractor shall, at all times, maintain an adequate workforce for the uninterrupted performance of all tasks defined within this SOW for the duration of the contract and option years. When hiring personnel, the Contractor shall keep in mind that the stability and continuity of the workforce are essential. Tasks with major disruptive impacts (e.g. most tasks in this SOW – sweeping, mopping, vacuuming, bathroom cleaning, surface cleaning, etc.) shall be coordinated and conducted either before or after the facility's visitation hours.

The Contractor shall perform the required scheduled custodial tasks prior to facility opening or minimal interruption during normal operation hours.

Visitor-use bathrooms should be cleaned twice per day, prior to 8:30 AM EST and between 12 PM and 2 PM each day. They should be cleaned and the contractor shall only close one bathroom or the other at a time to clean, while leaving the other open for use. The Contractor in this case shall provide signage to direct visitors that the bathroom is closed, and that the other, nearby bathroom is open. Contractor personnel should also help convey this message. The Contractor will be responsible for maintaining building security during the hours the building is occupied due to Contractor operations. The Contractor will be assigned a storage area for their cleaning equipment.

6.0 PREWORK CONFERENCE

Prior to commencement of work, the Contractor shall arrange a meeting with the Contracting Officer

(CO) to discuss the contract terms and work performance requirements. At this time, the Contractor shall designate, in writing, the name and phone number of the Contractor's on-site representative/supervisor and their responsibilities.

7.0 CONTRACTOR REPRESENTATIVE

The Contractor shall provide a contract representative for the performance of the work specified in this contract. The name of this person and an alternate(s) who shall act for the Contractor when the Contractor is absent shall be designated in writing to the CO. The Contractor's representative or alternate shall have full authority to act for the Contractor on all contract matters relating to daily operation of this contract. The Contractor's representative and alternate(s) must be able to read, write, speak, and understand English.

8.0 PERSONNEL

- 8.1 The Contractor shall employ personnel qualified and/or licensed and capable to perform landscaping services, janitorial work, and inspections, testing, and maintenance of HVAC systems and elevators, and will provide a list of personnel who will be on the premises and their work schedules.
- 8.2 All personnel providing services inside the buildings must be authorized to work in the United States and be proficient in reading, speaking, writing, and understanding English. The Contractor shall ensure that all employees are legal residents of the United States, qualified, possess the State of Florida or Federal certifications for their industry, skills, knowledge, training and completion of required State of Florida or Federal continuing education requirements to maintain qualifications for their skill, and satisfactorily perform the services required by the contract.
- 8.3 If a license or certification is not required to perform the type of work assigned, the individual must have verifiable work experience not less than three (3) years in duration.
- 8.4 Personnel providing services under this contract shall not be considered employees of the Government.
- 8.5 All employees assigned by the Contractor to perform work under this contract shall be physically able to do the assigned work during the entire period of the contract.
- 8.6 APPEARANCE OF PERSONNEL: The Contractor shall ensure that contract personnel always present a neat and professional appearance.
 - 8.6.1 Contractor's personnel shall remain fully clothed at all times while performing under this contract. This includes shirts with sleeves (short or long), long pants, and shoes. Offensive pictures, sayings, tank tops, ripped tee shirts or jeans are strictly prohibited.
 - 8.6.2 Employees must be neatly groomed and presentable (hair worn neatly and presentably, clean, and free of odors and dirt and stains, manicured with clean clothes and shoes, etc.).
- 8.7 UNIFORMS: The contractor and their subcontractors shall require all employees, including supervisors, to wear distinctive uniform clothing with the contractor's name for ready identification.
 - 8.7.1 At all times during contract performance contractor personnel shall wear a shirt or vest with the company logo and name. Every employee is to be in uniform no later than ten (10) working days from the date an employee first enters on duty. Uniforms shall be clean and neat in appearance and well maintained (free of visible dirt, stains, tears, rips, fraying, missing buttons

etc., and shall be worn presentably – i.e. buttoned tucked-in if applicable, collars turned down and worn neatly).

- 8.7.2 The Government reserves the right to approve the uniform recommended by the Contractor.

8.8 CONDUCT OF PERSONNEL. Contractor personnel's conduct shall not reflect discredit upon the federal government. The Contractor shall remove any employee for any violations of law or National Park Service (NPS) regulation from the jobsite as determined by the Contracting Officer or Park law enforcement. The removal from the job site of such a person shall not relieve the Contractor of the requirement to provide sufficient personnel to perform adequate and timely service.

8.9 The Contractor shall not employ any person who is an employee of the United States Government if the employment of that person would create a conflict of interest.

8.10 WILDLIFE AWARENESS TRAINING FOR CONTRACTOR EMPLOYEES: The contractor shall attend a training session hosted by NPS personnel regarding working within alligator, crocodile, and snake-frequented areas and within the National Park and around wildlife. At a minimum, the contractor shall have the Representative and all employees that shall work on this project attend the training. The Contractor shall request to the Contracting Officer's Representative (COR) a proposed date prior to beginning work for the training. Training shall take place at the Marjory Stoneman Douglas Visitor Center at an agreed upon time. Training shall cover how to handle and dispose of properly – waste and any other wildlife attractants, and to properly close doors and windows when working within the National Park.

9.0 GENERAL SCOPE

The contractor shall deliver the following service and provide a cost breakdown to include materials/equipment, labor, administrative, mobilization, and other fees. In accordance with the terms and conditions herein, the prime contractor or their sub-contractors shall perform the work of this contract for the NPS.

The contractor and all sub-contractors shall:

- 9.1 Have an on-site superintendent/foreman present at all times while work is being performed; there will always be an English-speaking person in a position of authority at the job site.
- 9.2 Furnish all labor, materials, equipment, tools, and supplies needed to perform janitorial services, landscaping services, and inspection, testing, and maintenance of HVAC systems and the elevator as described herein.
- 9.3 Provide cost estimating in conformity with the requirements herein.
- 9.4 Perform all work in accordance with applicable Occupational Safety and Health administration (OSHA) and codes and standards.
- 9.5 Possess proven experience and expertise in custodial services, landscaping services, and inspecting, testing, and maintaining HVAC and elevator systems.
- 9.6 Familiarize contracted and sub-contracted employees with existing systems, the components to be inspected, and critical exhibits and Park systems to be maintained during inspections and testing.
- 9.7 Verify the quantity of materials needed to complete the task identified.
- 9.8 Maintain confidentiality: The information devolved herein is the property of the United States Federal Government and shall be kept in strict confidence. All work generated by

the contractor in the course of this task order will remain the property of the government and must be returned to the government before final payment.

- 9.9 Provide a worksite and environment that is safe for employees, park visitors, and NPS staff. If necessary, the work area will be cordoned off and secured.
- 9.10 Notify the COR of any schedule changes or delays.
- 9.11 Not install or display company signs on government property.
- 9.12 Eat and smoke in areas designated by the COR.
- 9.13 Always wear appropriate clothing and ensure all contracted staff and sub-contracted staff refrain from the use of profanity within the earshot of visitors and employees.
- 9.14 Obey all posted speed limits.
- 9.15 Be knowledgeable of the site and required tasks and hazards prior to submitting a quote for the project.
- 9.16 Coordinate work to minimize disruption to operations and visitors.

10.0 GENERAL TASKS

Under this contract the contractor shall complete the following tasks and requirements:

- 10.1 Provide daily custodial services as described herein.
- 10.2 Provide landscape maintenance services as described herein.
- 10.3 Provide parking lot cleaning and striping services as described herein and in accordance with Manual on Uniform Traffic Control Devices (MUTCD) code/standards and applicable state and local transportation requirements.
- 10.4 Inspect, test, and maintain HVAC systems as described herein and in accordance with American National Standards Institute (ANSI)/American Society of Heating and Air-Conditioning Engineers (ASHRAE)/Air Conditioning Contractors of America (ACCA) Standard 180.
- 10.5 Inspect, test, and maintain the elevator as described herein and in accordance with Florida Building Code (FBC) and American Society of Mechanical Engineers (ASME) A17.1/CBA B44 code/standards.
- 10.6 Provide the Park with written inspection and testing reports for each system as described herein and in accordance with the industry standards, building code, and all Miami-Dade, state, and federal regulations.
- 10.7 Properly dispose of offsite all equipment, material and waste generated by the work of this contract unless otherwise directed by the COR.
- 10.8 Following each inspection, testing, and maintenance action, return the surrounding work site area to pre-work conditions.

11.0 DELIVERABLES

Before Notice to Proceed (NTP)

- 11.1 Provide a written narrative summary of how the contractor will execute the project within a timeline. The document will be referred to as the *Marjory Stoneman Douglas Visitor Contact Site Service/Maintenance Schedule*.
- 11.2 Provide a complete set of submittal samples at least one week prior to commencement of work. Submittals will require Park approval prior to the Contractor

- purchasing supplies for the project.
- 11.3 After contract award and prior to work starting, the contractor will participate in an on-site meeting to review the scope of the project, including where the work shall be conducted, the timing of the work, where the staging areas will be, tasks to be completed, and to identify landscape features, for example, structures or native vegetation, which shall be avoided and protected. The planning meeting will include site visits to view project locations. Project objectives, logistics, methods, equipment, staffing, scheduling, and regulations/guidance for working within the park will be discussed. The planning meeting should be attended by essential personnel from the contracting team.
 - 11.4 Provide a safety plan as identified in *Section 18: Safety* to the Park at least ten (10) days prior to commencement of work and will be incorporated into the resultant contract.
 - 11.5 Provide Safety Data Sheets (SDS) and cleaning product information: The list of materials shall include the name of the manufacturer, the brand name, and the intended purpose or use of each of the materials listed. A SDS for each product and material listed must also be provided. Chemicals must have containment boxes accompanied by numerically stored inventory sheets.
 - 11.6 The Contractor must submit a schedule for services listed as “weekly”, “monthly”, “quarterly”, and “semi-annual” work with dates to be performed. The Contractor must inform the Park of schedule changes at least one week in advance.
 - 11.7 Provide and keep current a written list of the names of all Contractor’s employees performing services under this contract and their work schedules.
 - 11.8 Provide proof of insurance, Environmental Protection Agency (EPA) 608 Certification, Class B State-certified HVAC contractor license (at a minimum), and proof of Florida Elevator Inspector Certification.

Invoices and Payments

- 11.9 Payment will be made monthly for work meeting or exceeding the Acceptable Quality Level (AQL), completed and accepted by the Government, covering the previous month’s service. Upon acceptance, the Government will pay monthly the appropriate amount for the number of times of occurrence of the services. The cost for these services would be added together for the amount due for fully acceptable service. Payment will be determined on the services and frequencies, less any deductions for any non-conforming or unacceptable performance.
- 11.10 The contractor shall supply a complete invoice to the COR in a timely manner for payment. Payment shall be made through the government electronic payment system and may take up to 30 days.
 - 11.10.1 The contractor must use the United States Department of the Treasury’s Invoicing Processing Platform (IPP).
 - 11.10.1.1 The website address is <https://www.ipp.gov>.
 - 11.10.1.1.1 The Contractor must use the IPP website to register, access, and use IPP for submitting requests for payment.
 - 11.10.1.1.2 Assistance with enrollment can be obtained by contacting the IPP Production Helpdesk via email at ippgroup@bos.frb.org or by telephone at (766) 973-3131.

Adjustments for Inadequate Performance

11.11 Routine inspection shall be performed to minimize work improperly performed. Such inspections are designed only to assure that the NPS pays only for those services, which have been specified, and adequately competed by the contractor; *and*

11.12 In the event the contractor fails to successfully perform the required work, the NPS has the right to withhold partial payment.

Park Responsibilities and Point of Contact

11.13 The COR will be announced at the time the contract is awarded. The COR is responsible for:

11.13.1 Monitoring the vendor's technical progress including the surveillance and assessment of performance and recommending to the Contracting Officer changes in requirements.

11.13.2 Interpreting the Scope of Work.

11.13.3 Performing technical evaluation as required.

11.13.4 Performing technical inspections and acceptances required by this contract.

11.13.5 Assisting in the resolution of technical problems encountered during performance.

11.13.6 Approving invoices.

12.0 GOVERNMENT FURNISHED PROPERTY AND FACILITIES

The Government shall deliver to the Contractor materials, supplies, property, and/or services (hereinafter referred to as "Government-furnished property") listed below at the work site prior to commencing work. As supplies need replenishing, the Contractor shall notify the COR **no less than 2 weeks in advance** so the items needed can be ordered. The Government will furnish the following items:

- Toilet tissue
- Paper towels for dispensers
- Liquid hand soap cartridges
- Trash bags and liners for all waste receptacles
- All utilities necessary for the Contractor to perform the required services as stated herein
- Keys will be signed for and returned upon completion or termination of the contract. Lost keys are the responsibility of the Contractor. See *Section 20: Security*.

The Contractor will have the use of a locked janitor's closet within the Marjory Stoneman Douglas Visitor Center. There is very limited storage space, therefore the contractor will be responsible for the daily transport of most equipment and supplies to and from the Visitor Center. The Contractor shall clearly mark all their supplies and materials within the closeted space provided. Items that don't fit into the closet space provided shall be stored off-site and transported to the work site each day. The NPS shall have materials and supplies co-mingled with the contractor's materials and supplies. As such, the contractor and NPS shall mutually agree where to keep these items and how to clearly mark these items as to whose they are. Contractor must have SDS log in the closet for all cleaning supplies along with responsible Contractor's contact information.

13.0 CONTRACTOR FURNISHED PROPERTY

13.1 EQUIPMENT: The Contractor shall furnish all equipment and materials necessary, except as noted in *Section 13: Government Furnished Property and Facilities*, to perform the tasks specified in this contract:

- 13.1.1 Equipment furnished by the Contractor shall be commercial grade and of the size and type customarily used in high quality work of this kind.
- 13.1.2 All equipment brought on to the premises is subject to the approval of the COR.
- 13.1.3 Equipment deemed by the COR, to be of improper type, design, or hazardous, shall be removed from the premises and replaced with satisfactory equipment.
- 13.1.4 All equipment shall have bumpers and guards to prevent marking or scratching of fixtures, furnishings, and/or building surfaces.
- 13.1.5 All electrical equipment used by the Contractor shall meet all safety requirements of this contract and must operate using existing building circuits.
- 13.1.6 Carpet cleaning equipment shall be of professional quality and capable of deep cleaning all carpets.
- 13.1.7 Pressure washing equipment shall be commercial grade with adjustable pressure settings.
- 13.1.8 Parking lot striping equipment shall be commercial grade with an enclosed spray box.

13.2 SUPPLIES: The Contractor shall furnish all products and materials necessary, except as noted in *Section 13: Government Furnished Property and Facilities*, to perform the tasks specified in this contract.

- 13.2.1 The Contractor shall not use any materials which the COR determines to be unsuitable for the work or harmful to the surfaces it is intended to be applied. This does not relieve the Contractor of any damages resulting from the application of such materials.
- 13.2.2 The Contractor shall not use any materials which the COR determines does not meet the requirements established by applicable Federal specifications and standards.
- 13.2.3 Safety Data Sheets (SDS) are required for all cleaning compounds and products used to perform the tasks specified in this contract.
- 13.2.4 Any cleaning chemical left in the building by the contractor shall be in a hazardous approved container in case of spillage or any kind of contamination and shall have a daily inventory sheet of all chemicals within the storage area along with approved SDS sheets.

13.3 BIOBASED PRODUCTS: The Contractor shall utilize products and materials made from biobased materials to the maximum extent possible without jeopardizing the intended end use or detracting from the overall quality delivered to the end user.

- 13.3.1 All supplies and materials shall be of a type and quantity that conform to applicable Federal specifications and standards, and to the extent feasible and reasonable, include the exclusive use of bio-based products.
- 13.3.2 The Contractor shall utilize the greatest number of bio-based products available that meet applicable health and environment specifications. All supplies and materials to be used in the performance of work under this contract are subject to the approval of the COR.

- 13.3.3 Products used for purposes of this contract shall comply with United States Department of Agriculture (USDA) requirements for bio-preferred cleaning products. Substitutions and equals shall be as stated under the requirements located at <https://www.biopreferred.gov/BioPreferred/>.
- 13.3.3.1 See the website provided above for more information regarding the USDA Affirmative Procurement Program.
- 13.3.4 The following is a list of categories for products that may be required for performance of custodial duties. Each product submitted for use under this contract must be identified with at least one of these categories (some products may be listed under more than one category). Labeling shall be printed on all containers:
- All-purpose cleaner
 - Heavy duty cleaner
 - Carpet shampoo
 - Gum remover
 - Disinfectant sanitizer
 - Extraction fluid
 - Floor stripper
 - Neutral cleaner (liquid)
 - Spot and stain remover
 - Air fresher including dispenser
 - Bathroom cleaner
 - Chrome polish/cleaner
 - Cream cleaner
 - Solvent spotter
 - Ph-balanced concrete soap
 - Degreaser/cleaner
 - Deodorizer
 - Floor finish
 - Floor finish restorer
 - Floor sealer
 - Furniture polish
 - Glass cleaner
 - Grout cleaner
 - Lime and scale remover
 - Stainless-steel polish
 - Toilet bowl cleaner
 - Whiteboard cleaner

14.0 TECHNICAL SPECIFICATIONS

CUSTODIAL OPERATIONS

14.1 DAILY SERVICES

All daily services are to be performed each day the Visitor Center is open during the scheduled period and holidays for the year and shall be performed during hours the Visitor Center is not open to the public and not occupied by Park staff on a regular schedule - see *Section 3: Place of Performance* for hours and dates of operation. Required daily services

shall include the following:

14.1.1 CLEAN RESTROOMS (upstairs and downstairs)

- 14.1.1.1 Provide adequate signage to inform visitors when a restroom is closed, and where the other restroom is located.
- 14.1.1.2 Sweep all floors to remove all loose dirt, dust, debris, etc.
- 14.1.1.3 Mop floors with disinfecting floor cleaner specific to high use flooring of the type being cleaned (i.e. tile, polished concrete).
 - 14.1.1.3.1 Amount of cleaner to be used and application rate per product manufacturer requirements for floor sanitizing as approved by the COR.
 - 14.1.1.3.2 Cleaned floor surface to be visibly clean and free of all debris, dirt, grim, and shall be clean in appearance and odor and free of streaks or haze and shall have a shiny finish. Finish floor shall be as approved by the COR and any re-cleaning due to insufficient finish shall be done at no additional expense to the Government. Product used shall allow floors to dry quickly and free of visible smearing or without haze. Finished floors shall be shiny and clean in appearance when completed. Mop and clean all floors to baseboards or wall edge including all corners and joints with vertical surfaces.
- 14.1.1.4 Clean all mirrors using cleaning product specific to mirror type. Application rate and cleaning method to follow cleaning product requirements. All mirror surfaces to be clean, shiny, and free of smears, smudges, or visible blemishes after cleaning.
- 14.1.1.5 Check or replace the liquid soap cartridges as provided by NPS. Contractor to obtain soap and supply a stock available for use at the Visitor Center. Contractor to replenish stock as needed from NPS.
- 14.1.1.6 Replace toilet paper rolls as required. Toilet paper rolls to be replaced when empty or very near empty within each bathroom stall. Toilet paper rolls to be provided by NPS – contractor to obtain from NPS, stocking a supply at the Visitor Center, and to replace as necessary.
- 14.1.1.7 Empty trash and dispose of in dumpsters at the Visitor Center. Replace trash bags, as provided by NPS. Contractor to obtain stock of trash bags from NPS and maintain supply and replenish as necessary. Empty all female hygiene cans and replace waste container liners. After removing trash bags from waste containers, clean and sanitize waste receptacles prior to replacing waste bags (female hygiene containers, trash containers and receptacles, trashcans, etc.). Cleaning and sanitizing shall be done using a cleaning product appropriate for the surfaces being cleaned, that contains a germicide and cleaning agent. Cleaning shall be done in accordance with approved cleaning product manufacturer's requirements and shall be done using manufacturer's required cleaning materials (sponge, cloth, rag, etc.). Application rates and mix rates as required by manufacturer of cleaning product.
- 14.1.1.8 Clean and sanitize all hand driers, paper towel dispensers, and all stainless steel in bathroom stalls (i.e. toilet paper holders, flush plates, partitions, partition latches, grab bars, etc.). Cleaning and sanitizing to

be done using a cleaning product as approved for use on stainless steel surfaces and surfaces to be cleaned. Product shall contain a germicide and cleaning agent and shall be mixed and applied as required by the product manufacturer, using manufacturer's required cleaning materials. All surfaces cleaned shall be clean in appearance, free of blemishes and glazed appearance, and shall be visually shiny and free of dirt, glare, grime, and visual uncleanliness.

14.1.1.9 Clean and sanitize sinks (bowl, fixture, spigots, handles, drains, chrome surfaces, mirror trim, drinking fountains, etc.), toilets (including toilet seats on both sides, under toilet seats, toilet bowls inside and out, entire toilet exterior and interior, handles, tanks, etc.), urinals (inside and outside, flush handles and piping, etc.), partitions, door handles and push plates, counter tops, and shower stalls. Cleaning and sanitizing shall be done using a cleaning product specific to the surfaces being cleaned, as approved, and shall be done so in accordance with cleaning product manufacturer's requirements at the application rates and with cleaning products required by manufacturer. Cleaning shall be done in a manner that leaves no visible dirt, hair, stains, grime, discoloration, haze or glare, smudges or blemishes on any surface cleaned upon completion. No standing or excess water shall remain following cleaning of surfaces.

14.1.1.10 Clean and sanitize all walls adjacent to and underneath urinals and behind toilets. Cleaning and sanitizing shall be done using a product specific to the type of surface being cleaned and as approved by the COR. All cleaning of surfaces shall be done in accordance with product manufacturer requirements. Upon completion, all cleaned surfaces shall be free of any visible dirt, grime, stains, hair, haze, or glare, and shall appear clean and shiny in nature.

14.1.1.11 Spot-clean all other surfaces and dust horizontal surfaces including tops of partitions and mirrors. Use cleaning products specific to the type of surface being cleaned, and clean in a manner as required by cleaning product manufacturers. All cleaned surfaces shall be free of dust, dirt, hair, blemishes, haze, or glare, and shall appear clean and shiny upon completion.

14.1.1.12 Clean and sanitize all drinking fountains. This shall include using cleaning products specific to cleaning and disinfecting drinking fountains in accordance with cleaning product requirements as well as in conformance to drinking fountain manufacturer requirements. Products for use shall include a germicide and cleaning solution to be applied at the rate and method according to the product manufacturer. Methods shall consider cleaning and sanitization of all parts of the drinking fountains – both exterior and interior including all locations where water is activated to flow on the valves, splashguards, spigots, drains, back splashes, bottle fillers, etc. Final cleaning shall leave drinking fountains free of dirt, scum, scale, discoloration, stains, debris, etc. on all portions of the drinking fountain.

14.1.2 **CLEAN FLOORS**

14.1.2.1 Vacuum all carpet (vestibule, office space, and conference room).

Vacuuming activities shall be done using a vacuum capable of removing all visible dirt, dust, hair, stains, mud, and debris from carpets. If stains or crusted on debris are on carpets, spot clean using a cleaning product and application as required by product manufacturer. Spot cleaning shall remove any stains or debris from carpets, and all carpets shall be left in a visibly clean state. Spot-clean all areas with visible stains as they occur. NPS may provide space in the janitor closet for a vacuum machine if the machine is not too large. If the machine does not fit in the closet, the contractor shall be responsible for storing the machine overnight and transporting it to the work site each day.

14.1.2.2 Sweep and mop all polished concrete, epoxy, LVT, porcelain tile, or other hard surfaced floors. Sweeping shall be done to remove all dirt, debris, dust, etc. from all hard surfaced floors. This shall include areas in and around exhibits, under furniture, and under floor mats, and the vestibule area at the front entrance including floor coverings and fixtures. Dust mopping surfaces shall consider acceptable in lieu of sweeping. Mopping hard-surfaced floors may be done using an automatic scrubber, as approved by the COR. It shall be noted that the floor shape is irregular, and there are numerous areas with displays that are difficult to use an auto-scrubber for the full size of the hard-surfaced floor. As a result, any areas not covered by use of an auto-scrubber shall be hand mopped. Mopping and auto-scrubbing shall be done in a manner that shall remove any and all floor marks, scuff marks, blemishes, dullness/haziness, streaks, excess dirt/dust/debris, etc. Upon completion of mopping or auto-scrubbing, floor surfacing shall appear shiny and clean in nature with no visible smudges, haze, glare, dirt, debris, stains, marks, etc. Mopping shall be done using a floor cleaning product specific to the type of flooring being mopped, as approved by the COR. If an auto-scrubber is used for this task, NPS may provide storage in the janitor closet for the auto-scrubber, if the machine fits into the closet space provided. If the machine is too large to fit in the space provided, the contractor shall be responsible for overnight storage and transport of the machine to the work area each day.

14.1.3 **HARD SURFACES**

14.1.3.1 Clean – by hand or with the use of hand tools or other approved means. Clean all surfaces using products and cleaners specific to the type of surface being cleaned. Clean all surfaces in compliance with manufacturer recommendations. All surfaces upon completion shall be clean, free of dirt/dust/debris/smudges/blemishes and shall not be dull or hazy in appearance and shall not have any marks or scuffs such as fingerprints or footprints.

14.1.4 **CLEAN ENTRANCES AND TOUCHABLE GLASS**

14.1.4.1 Clean all glass and windows at main entrance doors, vestibules, and all glass partitions. Cleaning shall be done using a product specific to window cleaning and shall be done in a manner as required by product manufacturer or by approved methods typical of this or similar work.

Cleaned surfaces shall appear clear and crisp with no visible blemishes, stains, marks, dullness, streaks, fingerprints or other marks that would otherwise be considered not clean.

- 14.1.4.2 Clean/wipe/dust metal window frames and door frames at entrance doors and vestibules (inside and outside) including inside vestibule area. Cleaning shall be done using cleaning products specific to the surface type to be cleaned, and in conformance with product manufacturer requirements. Finished surfaces shall appear free of dirt, grime, grease, marks, and shall have no visible blemishes, dullness, streaks, fingerprints, etc. Ensure all corners both at the top of the framing and along the floor are cleaned and free of dirt, dust, debris, cobwebs, etc.
- 14.1.4.3 Clean all touchable glass covering all interpretive displays located in the main area of the Visitor Center and along glass walls. This shall include using a glass cleaner and products as required for providing a clear glass surface that is free of smudges, marks, dirt, stains, fingerprints, dullness or haziness, etc. Glass surfaces shall appear clean and clear. Wipe any excess cleaning product as to not let it drip onto glass threshold or framing of displays. Cleaning of glass shall be done as required; surfaces are clean and free of fingerprints, dirt, smudges, etc. Glass surfaces shall be spot cleaned as needed.
- 14.1.4.4 All glass and framing inside and outside along glass walls shall be cleaned to only where visible streaking, smudging, dirt, debris, marking, etc. is noticeable. Otherwise, clean entire glass surfaced walls and metal framing for entire Visitor Center on a weekly basis.
- 14.1.5 **CLEAN AND DISINFECT ALL BENCHES AND SEATING AREAS**
 - 14.1.5.1 Utilize a cleaning and disinfecting product specific to the type of surface being cleaned and disinfected. Use in accordance with manufacturer's requirements. Ensure all wood benches, rock seating walls, and metal benches are thoroughly cleaned and free of dirt, streaks, smudges and visible blemishes. Benches and seating areas to be cleaned shall be only interior seating in the public area.
- 14.1.6 **CLEAN TRASH RECEPTACLES AND WASTE BASKETS (not already included in restroom cleaning)**
 - 14.1.6.1 Empty trash containers/bags in all trashcans and replace the liner supplied by the NPS. Dispose of full trash bags in trash dumpster located on premises. Empty trash containers in employee offices, the breakroom, main entrance vestibule, conference room and kitchen, at main desk, bookstore, and employee area. Empty all recycling containers and sort and dispose of recycling in appropriate bins provided in Visitor Center parking area. Wipe clean the surface of receptacles and waste baskets in visitor areas as needed to remove any soiling.
- 14.1.7 **CLEAN CONFERENCE ROOM**
 - 14.1.7.1 Wipe tables clean with disinfectant cleaner. Surfaces shall appear clean and free of marks, dirt, debris, stains, blemishes, etc. Note that if conference room was not in use the previous day, dusting shall take place only on an as needed basis (i.e. when dust is prevalent on tables

and surfaces).

14.1.8 **CLEAN KITCHEN**

14.1.8.1 Clean and sanitize counter tops and sink using a sanitizing cleaning solution as approved by the COR. Apply at the rate and method required by product manufacturer on both the sink and counter tops.

14.1.8.2 Dirty dishes and appliances are not included in cleaning of the kitchen area. Report anything left in the sink to the COR.

14.1.9 **SPOT CLEAN**

14.1.9.1 Spot cleaning shall be performed as necessary throughout the Visitor Center to remove obvious dust, dirt, cobwebs, smudges, and stains from glass windows and doors, walls, cabinets, fixtures, floors, vents, etc.

14.1.10 **AFTERNOON RE-CHECK (approximately 2:00 PM EST)**

14.1.10.1 **UPSTAIRS RESTROOMS (public restrooms)**

14.1.10.1.1 Clean countertops and sinks. Use cleaning products specific for these surfaces. Spray in accordance with product manufacturer's requirements and wipe down surfaces. Wipe down any excess water splashes and pick up any loose paper towel or toilet paper from floors or countertops.

14.1.10.1.2 Spot clean toilets as needed – as noted above.

14.1.10.1.3 Clean hand driers as stated above.

14.1.10.1.4 Check all toilet paper dispensers.

14.1.10.1.5 Check all soap dispensers. If less than ½ full, refill.

14.1.10.1.6 Mop bathroom floors.

14.1.10.1.7 Clean all mirrors.

14.1.10.1.8 Check all trash containers. Empty and replace trash bag if full.

14.1.10.2 **UPSTAIRS/DOWNSTAIRS 24-HOUR RESTROOMS**

14.1.10.2.1 Clean countertops and sinks.

14.1.10.2.2 Spot clean toilets as needed.

14.1.10.2.3 Clean hand driers.

14.1.10.2.4 Check all toilet paper dispensers.

14.1.10.2.5 Check all soap dispensers. If less than ½ full, refill.

14.1.10.2.6 Mop bathroom floor.

14.1.10.2.7 Clean all mirrors.

14.1.10.2.8 Check all trash containers. Empty and replace trash bag if full.

14.1.10.3 **VISITOR USE AREAS**

14.1.10.3.1 Check all public area trash cans and recycle containers. If full, empty and replace trash bags or sort and dispose of recycling and trash.

14.1.10.3.2 Clean touchable glass and doors at all public entrances. Glass shall be spot cleaned to remove visible blemishes, fingerprints, smears, smudges, etc.

14.2 **WEEKLY SERVICES**

All weekly services are to be performed as scheduled and include the following:

14.2.1 **DEEP CLEAN FLOORS**

14.2.1.1 Buff all polished concrete and epoxy floors using a buffing machine typical for use of this type and size of floor. Utilize the manufacturer's requirements for use of the buffing machine. Ensure buffing is done after the floor has been thoroughly swept and mopped (auto scrubbed). Use a floor polish consistent for use with polished concrete floors and only as approved by the COR for use in this application. Ensure that buffing pads are checked for excess dirt and debris to ensure the floor surface is not scratched in any way. Replace buffing pads as necessary. Ensure the area to be buffed is blocked off using caution tape, and the area to be buffed is done so only after the Visitor Center has either closed for the night, or prior to opening in the morning. Ensure plenty of time if done prior to opening for the day, that the entire floor can be buffed in one session and is not done in parts. Buffing machine shall be as approved by the COR and shall be a machine capable of providing a polished floor surface, spreading and polishing products using buffing brushes. Floor shall be shiny and free of blemishes, haze, scuffs, scratches, marks, and dullness. If any parts of the floor do not meet this standard, it shall be re-polished at the contractor's expense. Machine used for buffing shall be approximately a 200-rpm buffing machine.

14.2.2 DUSTING

14.2.2.1 Dust all dust catching surfaces (horizontal and vertical), including furniture, cabinets, fixtures, window ledges, doors, door hardware, door frames, office partitions, and blinds. This shall include tops of displays, tops of benches, maps, displays, etc. Dry dust using only a clean dusting wand typical of this type of work. Do not apply dusting or cleaning products to any displays as to not cause any damage.

14.2.3 CLEAN GLASS

14.2.3.1 Clean inside and outside of glass windows and doors.

14.2.3.2 Clean inside and outside of metal window frames and door frames.

14.2.3.3 Clean all glass windows, doors, and walls as well as all door and window framing as stated previously (methods, cleaning products, etc.).

14.2.4 CLEAN EXTERIOR HANDRAILS

14.2.4.1 With a soft cloth, mild cleaner, and water, wipe down three sets of stair handrails and the second-floor balcony railings. Do not pressure wash handrails and balcony railings.

ELEVATOR INSPECTION, TESTING, SERVICE, AND MAINTENANCE

14.3 The Contractor shall obtain a maintenance service contract from an elevator company certified to inspect, test, service, and maintain Kone elevator(s). All services and outage requests shall be handled in a timely manner. All service invoices must be paid for by the prime contractor. The Contractor shall produce a copy of the certificate to the COR upon completion of inspection. Contractor must ensure that all safety inspections are complete according to County, State, and National Park Service policies and regulations.

HVAC SYSTEM INSPECTION, TESTING, SERVICE, AND MAINTENANCE

14.4 The contractor must provide air conditioning service, maintenance, and repairs in the

Visitor Center as aligned with industry standards and manufacturer guidelines. System specifications are listed in *Appendix 2: Work Locations and Proposed Quantities*.

14.4.1 **DAILY CHECKS**

14.4.1.1 Ensure all air handlers and thermostats are on the ON setting and set to cool.

14.4.1.2 Ensure no air handlers are dripping water into the drip pan. Correct the problem if there is an issue.

14.4.2 **MONTHLY SERVICE**

14.4.2.1 Inspect overall system operation. Check for unusual noises, vibrations, or odors.

14.4.2.2 Verify thermostat/calibration and test setpoints.

14.4.2.3 Inspect exposed ductwork for visible leaks or damage.

14.4.3 **AHUs**

14.4.3.1.1 Inspect belts for wear/tension; adjust or replace as needed.

14.4.3.1.2 Lubricate bearings and moving parts (if not permanently sealed).

14.4.3.1.3 Inspect motor amperage draw vs nameplate data.

14.4.3.1.4 Inspect and clean condensate pans and drain lines. Maintain all condensate lines that they are free of stoppage.

14.4.4 **FILTERS AND AIR QUALITY**

14.4.4.1.1 Replace air conditioning filters in all air handlers.

14.4.4.1.2 Clean filters in mini splits type units.

14.4.4.1.3 Check outdoor air dampers for correct position and function.

14.4.5 **COOLING COMPONENTS**

14.4.5.1.1 Check refrigerant site glass (if accessible) for bubbles or oil.

14.4.5.1.2 Inspect coils for visible dirt or corrosion (evaporator and condenser).

14.4.5.1.3 Ensure condenser fans are clean and balanced.

14.4.5.1.4 Confirm temperature differential across coil (delta-T).

14.4.6 **ELECTRICAL AND CONTROLS**

14.4.6.1.1 Check control panel for secure wiring and signs of overheating.

14.4.6.1.2 Inspect contactors, capacitors, and relays.

14.4.6.1.3 Test safety switches and float switches.

14.4.7 **DRAINAGE AND HUMIDITY**

14.4.7.1.1 Flush condensate drain lines with approved cleaner.

14.4.8 **DOCUMENTATION**

14.4.8.1.1 Log filter change dates, amperage readings, and delta-T values.

14.4.8.1.2 Report anomalies (e.g., compressor short-cycling, tripped breakers, etc.)

14.4.8.1.3 Submit monthly service report to COR.

14.4.9 **BI-ANNUAL SERVICE (TWICE PER YEAR)**

14.4.9.1 Perform a full operational test.

14.4.9.2 Verify function of all zone controls, dampers, and actuators.

14.4.9.3 Inspect and calibrate thermostats and programmable schedules.

14.4.10 **AHUs**

- 14.4.10.1.1 Inspect and tighten fan belts; replace worn belts.
- 14.4.10.1.2 Lubricate all moving parts (bearings, motors, dampers) unless sealed.
- 14.4.10.1.3 Clean blower fans and inspect wheel balance.
- 14.4.10.1.4 Check fan motor amperage and voltage.

14.4.11 **FILTER AND COIL MAINTENANCE**

- 14.4.11.1.1 Change filters in the RTU unit.
- 14.4.11.1.2 Change in-line filters located in the men's restrooms and the canoe room storage closet.
- 14.4.11.1.3 Inspect and clean evaporator and condenser coils.
- 14.4.11.1.4 Check return and supply vents and grilles.

14.4.12 **CONDENSATE AND DRAINAGE**

- 14.4.12.1.1 Flush and test condensate drain lines and traps.
- 14.4.12.1.2 Clean drain pans; inspect coils and clean debris from outdoor units.
- 14.4.12.1.3 Verify compressor operation and temperature differential (delta-T).

14.4.13 **ELECTRICAL AND CONTROLS**

- 14.4.13.1.1 Inspect all electrical panels and tighten terminal connections.
- 14.4.13.1.2 Test safety devices: high/low pressure switches, limit switches.
- 14.4.13.1.3 Check capacitors, contactors, and relays for wear and pitting.
- 14.4.13.1.4 Confirm emergency shut-off switches are functioning.

14.4.14 **DOCUMENTATION AND REPORTING**

- 14.4.14.1.1 Record motor amperage, refrigerant levels, and temperature splits.
- 14.4.14.1.2 Log completed preventative maintenance.
- 14.4.14.1.3 Report deficiencies needing follow-up (e.g., compressor issues, failing sensors).
- 14.4.14.1.4 Update services records with inspection date, technician name, and findings.

14.4.15 **ANNUAL SERVICE**

- 14.4.15.1.1 Conduct a comprehensive performance evaluation of all HVAC equipment.
- 14.4.15.1.2 Inspect overall system integration.
- 14.4.15.1.3 Perform airflow testing and balancing to verify proper distribution.
- 14.4.15.1.4 Evaluate condition of system components for replacement needs.

14.4.16 **AHUs**

- 14.4.16.1.1 Remove and inspect blower assembly and housing.
- 14.4.16.1.2 Deep clean and inspect blower motors and fan wheels.
- 14.4.16.1.3 Inspect and torque all motor mounts, pulleys, and housing fasteners.
- 14.4.16.1.4 Perform vibration analysis (if applicable) to detect bearing

or motor wear.

14.4.16.1.5 Clean evaporator coils from all air handlers.

14.4.16.1.6 Service AHUs and condenser units.

14.4.17 COIL AND DUCT CLEANING

14.4.17.1.1 Deep clean evaporator and condenser coils with appropriate chemical cleaners approved by the COR.

14.4.17.1.2 Inspect ductwork interiors for dust accumulation, microbial growth, or leaks.

14.4.17.1.3 Clean and sanitize ductwork as needed.

14.4.18 COOLING EQUIPMENT MAINTENANCE

14.4.18.1.1 Verify refrigerant charge levels and adjust per manufacturer specs (licensed technician required).

- Pressure test system for leaks if refrigerant loss is suspected.

14.4.18.1.2 Inspect condition on condensers and contactors for wear or overheating.

14.4.18.1.3 Calibrate and test all temperature sensors and safety switches.

14.4.19 CONDENSATE AND DRAINAGE SYSTEM

14.4.19.1.1 Inspect and clean condensate pans, drains, and traps thoroughly.

14.4.19.1.2 Test float switches and drain pumps for reliable operation.

14.4.19.1.3 Verify proper slope and routing of all drain piping.

14.4.20 ELECTRICAL SYSTEMS

14.4.20.1.1 Inspect and torque all electrical terminals and connections.

14.4.20.1.2 Test capacitors, relays, and transformers for degradation.

14.4.20.1.3 Clean and vacuum inside electrical panels.

14.4.21 CONTROLS AND BUILDING AUTOMATION

14.4.21.1.1 Calibrate thermostats, sensors, and damper actuators.

14.4.21.1.2 Test all alarms and overrides for functional accuracy.

14.4.21.1.3 Update software/firmware if required.

14.4.22 DOCUMENTATION AND REPORTING

14.4.22.1.1 Update HAVC maintenance records in log.

14.4.22.1.2 Log all readings, deficiencies, completed work and recommendations.

BI-ANNUAL PRESSURE WASHING SERVICES

14.5 GENERAL STANDARDS

14.5.1 Pressure wash twice per year; once at the end of high season (April) and once at the beginning of high season (October).

14.5.2 Use commercial-grade pressure washing equipment with adjustable pressure settings.

14.6 ENVIRONMENTAL PROTECTION

14.6.1 Prevent runoff into storm drains and waterways.

14.6.2 Use best management practices for water control.

14.6.3 Protect adjacent landscaping, vegetation, and wildlife.

14.6.4 Any chemical spills or environmental damage shall be immediately reported and remediated at Contractor's expense.

14.7 PROTECTION OF PROPERTY

- 14.7.1 Protect all adjacent surfaces, including:
 - 14.7.1.1 Windows, doors, and finishes
 - 14.7.1.2 Electrical components
 - 14.7.1.3 Signage and fixtures
- 14.7.2 Cover or shield sensitive areas prior to cleaning

14.8 METHODS

- 14.8.1 Pressure settings shall be appropriate for the surface type:
- 14.8.2 Soft materials (coral rock, painted surfaces, and signage):
 - 14.8.2.1 Low pressure/soft wash (≤ 500 PSI) with detergent
- 14.8.3 Concrete and hardscapes:
 - 14.8.3.1 2,500-4,000 PSI, as appropriate
- 14.8.4 Wood or composite dock surfaces:
 - 14.8.4.1 $\leq 1,500$ PSI
- 14.8.5 Use fan-tip nozzles only; zero-degree tips are prohibited.

14.9 CLEANING AGENTS

- 14.9.1 Use biodegradable, non-toxic, and environmentally compliant detergents.
- 14.9.2 Cleaning agents must:
 - 14.9.2.1 Effectively remove mold, mildew, algae, and salt deposits
 - 14.9.2.2 Be safe for adjacent vegetation and aquatic environments

14.10 SURFACE SPECIFIC REQUIREMENTS

14.10.1 BUILDING EXTERIORS

14.10.1.1 EXTERIOR WALLS

- 14.10.1.1.1 Clean all wall surfaces, including joints and architectural features
- 14.10.1.1.2 Remove mildew, algae, and atmospheric features
- 14.10.1.1.3 Protect sealants, coatings, and finishes

14.10.1.2 EXTERIOR CEILINGS

- 14.10.1.2.1 Use low-pressure washing to avoid water intrusion
- 14.10.1.2.2 Protect lighting fixtures, electrical systems, and vents

14.10.1.3 STAIRS AND OBSERVATION DECK

- 14.10.1.3.1 Remove embedded dirt, algae, and slip hazards
- 14.10.1.3.2 Ensure surfaces are safe for pedestrian use (non-slip condition restored)

14.10.2 CONCRETE HARDSCAPE AND SIDEWALKS

- 14.10.2.1 Remove oil stains, gum, and dirt buildup
- 14.10.2.2 Maintain uniform cleaning patterns across large areas

14.10.3 PARKING LOT CURBS

- 14.10.3.1 Clean all exposed faces along full linear extent
- 14.10.3.2 Remove tire marks and accumulated grime

14.10.4 MARINE AND WATERFRONT STRUCTURES (Includes kayak launch, boat docks, and bulkhead cap)

- 14.10.4.1 Remove algae, salt residue, and marine growth
- 14.10.4.2 Prevent contaminants from entering water
 - 14.10.4.2.1 Use containment or recovery methods where required
- 14.10.4.3 Avoid damage to marine-treated materials

14.10.5 CORAL ROCK BENCHES

- 14.10.5.1 Use soft wash methods only to prevent erosion

- 14.10.5.2 No high-pressure washing permitted
- 14.10.5.3 Preserve natural stone texture and integrity
- 14.10.6 **BOLLARDS**
 - 14.10.6.1 Clean full height and circumference of each bollard
 - 14.10.6.2 Remove dirt and grime buildup, tire marks, scuffing, and rust staining (where applicable and without damaging coating)
 - 14.10.6.3 Ensure uniform appearance across all bollards

ANNUAL PARKING LOT STRIPING & MARKINGS

14.11 GENERAL STANDARDS

- 14.11.1 Restripe parking stalls (standard and Americans with Disabilities Act [ADA]), drive aisles and directional arrows, crosswalks and pedestrian marking, accessible parking symbols and access aisles, curbs, and no parking/fire lanes
 - 14.11.1.1 Clean all surfaces prior to striping
 - 14.11.1.1.1 Remove all dirt, dust, grease, and debris by power sweeping, air blowing, and/or pressure washing
 - 14.11.1.2 Use traffic-grade, fast-drying paint suitable for asphalt or concrete.
 - 14.11.1.3 Paint shall be waterborne acrylic or solvent-based and resistant to fading, abrasion, and weathering
 - 14.11.1.4 Color requirements:
 - 14.11.1.4.1 White: standard parking stalls
 - 14.11.1.4.2 Yellow: traffic control markings
 - 14.11.1.4.3 Blue: ADA Spaces
 - 14.11.1.4.4 Red: fire lanes
 - 14.11.1.5 Glass beads shall be applied where specified
 - 14.11.1.6 Apply paint using professional striping equipment for uniform lines.
 - 14.11.1.7 Do not apply striping when pavement is wet or damp, rain is imminent
 - 14.11.1.8 Ensure proper curing conditions for durability
 - 14.11.1.9 Protect freshly striped areas from traffic until fully cured:
 - 14.11.1.10 Provide barricades, cones, or warning tape

ANNUAL SIGNAGE INSPECTION, MAINTENANCE & REPAIR

14.12 INSPECTION

- 14.12.1 Conduct a comprehensive annual inspection of all signage and associated components. Inspection activities include:
 - Assessment of structural integrity of sign panels, frames, posts, and foundations
 - Evaluation of surface conditions including fading, peeling, cracking, delamination, or vandalism (e.g., graffiti)
 - Verification of legibility, accuracy, and visibility of all text and graphics
 - Inspection of mounting hardware for corrosion, loosening, or failure
 - Confirmation that all signage meets current safety and accessibility standards
- 14.12.2 A written inspection report shall be submitted to the Contracting Officer's

Representative (COR) within 10 business days of completion.

14.13 MAINTENANCE & REPAIR

14.13.1 Based on inspection findings, the Contractor shall perform necessary maintenance and minor repairs, including:

14.13.1.1 Cleaning of sign surfaces using non-abrasive, manufacturer-approved methods

14.13.1.2 Removal of graffiti and application of protective coatings where applicable

14.13.1.3 Tightening or replacement of fasteners, brackets, and hardware

14.13.1.4 Minor surface repairs such as sealing cracks or edges to prevent moisture intrusion

14.13.1.5 Re-leveling or resetting of signposts and bases as needed

14.14 ENTRANCE SIGN

14.14.1 Clean all exposed surfaces, including front and back faces, structural supports and framing, bases and foundations

14.14.2 Special care shall be taken to preserve lettering and graphics

LANDSCAPE MAINTENANCE (OPTION YEAR 1)

14.15 GENERAL STANDARDS

14.15.1 Work shall include irrigation support, vegetation maintenance, weed control, and upkeep of decorative ground cover materials (e.g., seashells and pine needles). The objective is to maintain a safe, resilient, and aesthetically pleasing landscape while accounting for coastal conditions such as salt exposure, high winds, sandy soils, and periodic storm events.

14.15.2 All landscaping activities shall be performed in a manner that protects existing vegetation, irrigation systems, utilities, and surrounding natural and cultural resources. The Contractor shall use industry best practices and environmentally responsible methods and comply with all coastal resource protection requirements.

14.16 WATERING PLANTS

Water all landscaped areas, including flower beds, shrubs, and ornamental plantings, at a frequency sufficient to maintain healthy plant conditions

14.16.1 Adjust watering schedules based on seasonal conditions, rainfall, and plant type

14.16.2 Identify and report irrigation deficiencies, including corrosion-related failures

14.16.3 Water all landscaped areas at a frequency sufficient to maintain healthy plant conditions, accounting for rapid drainage in sandy soils

14.16.4 Adjust irrigation practices to flush salt buildup from root zones where necessary

14.16.5 Monitor for drought stress, salt burn, or overwatering

14.16.6 Identify and report irrigation deficiencies (e.g., broken sprinkler heads, leaks) to the COR

14.17 TRIMMING & PRUNING

14.17.1 Trim bushes, hedges, and shrubs to maintain neat, uniform appearance and appropriate size

14.17.2 Remove dead, diseased, or damaged branches and storm-damaged, salt-burned, or dead vegetation

14.17.3 Ensure vegetation does not obstruct signage, walkways, accessibility features,

or building elements

- 14.17.4 Perform pruning in accordance with accepted horticultural practices for plant health

14.18 WEED CONTROL

- 14.18.1 Remove weeds from all flower beds, landscaped areas, and around signage and structures
- 14.18.2 Ensure root removal to minimize regrowth
- 14.18.3 Maintain weed-free conditions to preserve plant health and visual quality
- 14.18.4 Use herbicides only if approved by the COR and in accordance with all applicable regulations
- 14.18.5 The Contractor shall not apply any herbicides without prior written approval from the COR.
- 14.18.6 All herbicide use shall comply with applicable federal, state, and local regulations, as well as National Park Service policies.
- 14.18.7 The Contractor shall maintain accurate records of all herbicides applied, including product name, active ingredients, quantities used, application locations, and dates of application. These records shall be submitted to the COR as part of routine reporting requirements and upon request.

14.19 REPLACEMENT OF GROUND COVER MATERIALS

- 14.19.1 Replace seashells and pine needles in garden beds as needed to maintain consistent coverage, depth, and appearance
- 14.19.2 Ensure materials are evenly distributed and free of debris
- 14.19.3 Match existing material type, size, and color unless otherwise directed by the COR
- 14.19.4 Remove and dispose of degraded or displaced materials prior to replacement

14.20 DEBRIS REMOVAL & SITE CLEANLINESS

- 14.20.1 Remove all landscape debris (e.g., clippings, weeds, branches) generated during maintenance activities and from minor storm events (branches, displaced mulch, and sand accumulation)
 - 14.20.1.1 Legally dispose of off-site all landscape debris at the Contractor's expense
- 14.20.2 Leave all work areas clean and free of hazards at the end of each service visit

14.21 SCHEDULING & FREQUENCY

- 14.21.1 Landscaping services shall be performed on a routine schedule to maintain site conditions, with frequency adjusted seasonally and as directed by the COR. The Contractor shall coordinate all activities to minimize disruption to visitor use and operations.

14.22 SAFETY & ENVIRONMENTAL COMPLIANCE

- 14.22.1 The Contractor shall comply with all applicable safety standards and environmental protection requirements. Special care shall be taken to avoid damage to irrigation systems, utilities, and protected resources. Any damage caused by the Contractor shall be repaired at no additional cost to the Government.

14.23 DOCUMENTATION & REPORTING

- 14.23.1 The Contractor shall maintain service logs documenting dates of service, tasks performed, materials used, and any identified issues. Logs shall be submitted to the COR on a monthly basis or upon request. The Contractor shall notify the COR promptly of any conditions requiring additional attention or repair

beyond routine maintenance.

15.0 PERFORMANCE REQUIREMENTS STANDARDS

- 15.1 The Contractor shall be expected to ensure services are provided or performed to appropriate standards. Custodial services, HVAC and elevator inspection, service, and maintenance required by this contract are generally of such nature that nonconforming or incomplete performance disclosed by Government inspection is subject to correction of deficiencies within 48 to 72 hours by re-performance. Late performance will result in a deduction being made to the contract price for the month.

16.0 INSPECTIONS

- 16.1 Inspection by the Government of the Visitor Center and restrooms, HVAC, elevator, and landscaping services, following services, shall be done to determine the acceptability of the workmanship, and any deficiencies encountered will be called to the attention of the Contractor. Correction of all deficiencies will be made prior to re-inspection and acceptance of work by the Government in conformance with the performance standards.
- 16.2 Contractor shall submit a daily checklist, which includes task lists for accomplishment and any remarks, to ensure quality standards are being met. These checklists will be utilized by the COR to substantiate work completed and to schedule and perform government inspections.
- 16.3 Any Government personnel or visiting public may observe unacceptable services, incomplete work, or required services not performed and may contact the CO or the COR to communicate a complaint. Customer complaints will be substantiated by the COR for validity. Should the COR determine that the complaint is valid, the COR will inform the Contractor orally and in writing. Refer to the *Appendix 2: Acceptable Quality Level* for remedy for non-conforming services. Unresolved disputes shall be forwarded to the CO for determination.

CUSTODIAL INSPECTIONS

- 16.4 INSPECTION METHODS: Random inspection, scheduled inspection, visitor/employee feedback, service log reviews, spot checks.
- 16.5 INSPECTION CHECKLIST ITEMS
- 16.5.1 Floors: Clean, dry, free of debris or spills.
 - 16.5.2 Restroom fixtures: Clean, odor-free, and sanitized.
 - 16.5.3 Trash receptacles: Emptied before full, liners replaced, receptacle clean.
 - 16.5.4 Soap, paper towels, and toilet paper: Stocked.
 - 16.5.5 Glass surfaces and mirrors: Clean and streak-free.
 - 16.5.6 High-touch surfaces: Disinfected per the schedule.
 - 16.5.7 Odors: None present.
 - 16.5.8 Dust: Absent from sills, vents, ledges, and corners.
 - 16.5.9 Emergency spill response: Resolved promptly
 - 16.5.10 Janitor closets: Organized, safe, and stocked.

16.6 PERFORMANCE RATING SCALE

- 16.6.1 Acceptable: Meets or exceeds all standards; no deficiencies observed.
- 16.6.2 Marginal: Minor deficiencies noted; no impact on safety or visitor experience.
- 16.6.3 Unacceptable: Major deficiencies; repeat issues; health/safety concern or visitor complaint.

16.7 DOCUMENTATION AND CORRECTIVE ACTION

- 16.7.1 Deficiencies will be documented and communicated to the Contractor within

24 hours.

16.7.2 The contractor must respond with a corrective action plan within 48 to 72 hours.

16.7.3 Re-inspection will be scheduled as necessary to verify correction.

16.7.4 Repeat or unresolved issues may result in deductions, performance evaluation downgrades, or contract escalation.

16.8 ROLES AND RESPONSIBILITIES

16.8.1 Inspector: COR or Facility Management Staff: Conducts inspections, documents findings, communicates with Contractor, and monitors performance trends.

16.8.2 Contractor Supervisor: Receives inspection results, coordinates response actions, submits corrective plans, and ensures compliance.

16.8.3 Facility Manager: Reviews outcomes, approves corrective actions, oversees contract compliance and resolves disputes or escalated performance issues.

HVAC INSPECTIONS

16.9 INSPECTION METHODS Scheduled site inspections, document review, spot checks, witness testing, performance monitoring.

16.10 INSPECTION CHECKLIST ITEMS

16.10.1 Preventative maintenance tasks completed per scope.

16.10.2 Refrigerant charge tested and documented (licensed technician only).

16.10.3 Coils and condensate systems cleaned and drained properly.

16.10.4 Electrical connections tight; no signs of overheating.

16.10.5 Safety devices tested: limit switches, shutdowns, pressure sensors.

16.10.6 Thermostat inputs calibrated.

16.10.7 System startup/shutdown confirmed operational.

16.10.8 Airflow direction, damper operation, and control sequences verified.

16.10.9 Service reports submitted within required timeframe.

16.10.10 Deficiencies noted and corrected

16.11 PERFORMANCE RATING SCALE

16.11.1 Acceptable: All services completed to specification; no deficiencies or only minor, not recurring ones.

16.11.2 Marginal: One or more minor deficiencies; corrective action required but not urgent.

16.11.3 Unacceptable: Major deficiency, recurring issues, safety violation, or missed scheduled service.

16.12 DOCUMENTATION AND REPORTING

16.12.1 Deficiencies will be documented and communicated to the Contractor within 24 hours.

16.12.2 The contractor must respond with a corrective action plan within 48 to 72 hours.

16.12.3 Re-inspection will be scheduled as necessary to verify correction.

16.12.4 Repeat or unresolved issues may result in deductions, performance evaluation downgrades, or contract escalation.

16.13 ROLES AND RESPONSIBILITIES

16.13.1 Inspector: COR or Facility Management Staff: Conducts inspections, documents findings, communicates with Contractor, and monitors performance trends.

16.13.2 Contractor Supervisor: Receives inspection results, coordinates response

actions, submits corrective plans, and ensures compliance.

- 16.13.3 Facility Manager: Reviews outcomes, approves corrective actions, oversees contract compliance and resolves disputes or escalated performance issues.

ELEVATOR INSPECTIONS

16.14 INSPECTION FREQUENCY

- 16.14.1 Quarterly or Bi-Annual Maintenance: Within five (5) business days of service.
- 16.14.2 Annual Testing: Immediately after completion (witnessed or documented).
- 16.14.3 Emergency Repairs/Entrapment Events: Within one (1) day of service resolution.

- 16.15 INSPECTION METHODS Scheduled inspection, random spot check, witness testing, document review, user feedback review.

16.16 INSPECTION CHECKLIST ITEMS

- 16.16.1 PM performed per schedule (e.g., lubrication, adjustments, door operation checks)
- 16.16.2 Control panel and machine room clean and organized
- 16.16.3 Door sensors, interlocks, and re-opening devices operational
- 16.16.4 Emergency phone/intercom functions properly
- 16.16.5 Fire service recall system tested and compliant
- 16.16.6 Lights, alarm bell, and emergency signage functional
- 16.16.7 Elevator runs smoothly with no abnormal noise or vibration
- 16.16.8 Floor leveling is accurate within code tolerances
- 16.16.9 Oil levels checked and recorded (hydraulic systems)
- 16.16.10 Safety brakes, overspeed governors, and safeties inspected/tested
- 16.16.11 Contractor submitted service and test reports within required timeframe

16.17 PERFORMANCE RATING SCALE

- 16.17.1 Acceptable: All services meet standards; documentation complete; no deficiencies found.
- 16.17.2 Marginal: Minor issues found (e.g., late documentation, cosmetic wear); corrected promptly.
- 16.17.3 Unacceptable: Major safety violation, missed service, system failure, or repeat deficiencies.

16.18 DOCUMENTATION AND REPORTING

- 16.18.1 Deficiencies will be reported to the contractor within 24 hours.
- 16.18.2 The contractor must provide a Corrective Action Plan within 48 to 72 hours.
- 16.18.3 Re-inspections will be scheduled for all safety-related deficiencies.
- 16.18.4 Continued noncompliance may result in withheld payments, deductions, or contract escalation.

16.19 ROLES AND FUNCTIONS

- 16.19.1 Inspector: COR or Facility Management Staff: Conducts inspections, documents findings, communicates with Contractor, and monitors performance trends.
- 16.19.2 Contractor Supervisor: Receives inspection results, coordinates response actions, submits corrective plans, and ensures compliance.
- 16.19.3 Facility Manager: Reviews outcomes, approves corrective actions, oversees contract compliance and resolves disputes or escalated performance issues.

LANDSCAPING SERVICES INSPECTIONS

The purpose of inspections is to ensure all landscaping and site maintenance services are performed in accordance with contract requirements and maintained at a level that supports visitor

safety, resource protection, and overall site appearance. This includes, but is not limited to, pressure washing, parting lot striping, signage maintenance and repair, watering of plants, trimming and pruning, weed control, replacement of ground cover materials, and debris removal. Inspection coverage may include all or a representative sample of work areas and service types.

16.20 INSPECTION FREQUENCY

- 16.20.1 Routine Inspections: Monthly or as determined by the Facility Manager or COR
- 16.20.2 Random Inspections: Unannounced inspections of selected work areas or tasks
- 16.20.3 Post-Work Inspections: Conducted following completion of specific services (e.g., pressure washing, striping, major pruning)
- 16.20.4 Seasonal/Condition-Based Inspections: Focused on plant health, weed conditions, or storm impacts

16.21 INSPECTION METHODS

The Government may use one or more of the following methods to evaluate Contractor performance:

- 16.21.1 Visual Inspection: Direct observation of completed work to assess quality, completeness, and compliance
- 16.21.2 Random Sampling: Evaluation of a percentage of completed work (e.g., selected landscape beds, sections of parking lot, or signage assets)
- 16.21.3 Checklists: Use of standardized inspection checklists aligned with contract requirements
- 16.21.4 Documentation Review: Review of Contractor-submitted service logs, herbicide application records, and maintenance reports
- 16.21.5 Photographic Verification: Before-and-after photo documentation for selected tasks
- 16.21.6 Customer Feedback: Consideration of visitor or staff complaints or comments
- 16.21.7 Joint Inspections: Periodic walkthroughs with Contractor and Government representatives

16.22 INSPECTION CHECKLIST ITEMS

16.22.1 GENERAL SITE CONDITIONS

- 16.22.1.1 Grounds are clean, orderly, and free of hazards
- 16.22.1.2 No visible litter, trash, or uncollected debris present
- 16.22.1.3 Work areas restored to pre-service conditions
- 16.22.1.4 No evidence of damage to facilities, utilities, or natural resources caused by Contractor operations

16.22.2 PRESSURE WASHING

- 16.22.2.1 Surfaces are uniformly clean (walkways, plazas, building exteriors, hardscape areas)
- 16.22.2.2 No streaking, residue, or missed areas
- 16.22.2.3 Appropriate cleaning methods used without surface damage
- 16.22.2.4 Runoff is controlled and does not impact landscaped or sensitive areas
- 16.22.2.5 No debris left in drains, gutters, or adjacent areas

16.22.3 PARKING LOT STRIPING

- 16.22.3.1 Striping is clearly visible and consistent with existing layout
- 16.22.3.2 Lines are straight, properly aligned, and uniform in width
- 16.22.3.3 ADA spaces and markings are correctly identified and compliant

- 16.22.3.4 No overspray or paint on unintended surfaces
- 16.22.3.5 Reflectivity and paint condition meet expected standards
- 16.22.4 SIGNAGE MAINTENANCE AND REPAIR
 - 16.22.4.1 Signs are clean, legible, and free of graffiti
 - 16.22.4.2 Sign panels are secure, level, and properly mounted
 - 16.22.4.3 No fading, peeling, or missing components affecting readability
 - 16.22.4.4 Posts and hardware are structurally sound and corrosion-free
 - 16.22.4.5 Repairs match existing materials and appearance
- 16.22.5 WATERING OF PLANTS
 - 16.22.5.1 Plants are adequately hydrated with no signs of stress or wilting
 - 16.22.5.2 Irrigation coverage is uniform and functional
 - 16.22.5.3 No evidence of overwatering, runoff, or erosion
 - 16.22.5.4 Seasonal adjustments are appropriate and documented
 - 16.22.5.5 Irrigation issues are identified and reported
- 16.22.6 TRIMMING AND PRUNING
 - 16.22.6.1 Shrubs and hedges are neatly shaped and evenly maintained
 - 16.22.6.2 No obstruction of walkways, signage, or accessibility routes
 - 16.22.6.3 Dead, diseased, or damaged vegetation removed
 - 16.22.6.4 Cuts are clean and consistent with horticultural best practices
 - 16.22.6.5 Storm or wind damage appropriately addressed
- 16.22.7 WEED CONTROL
 - 16.22.7.1 Flower beds and landscaped areas are substantially weed-free
 - 16.22.7.2 Weeds removed at root level where feasible
 - 16.22.7.3 No invasive overgrowth in maintained areas
 - 16.22.7.4 Weed control does not damage desirable vegetation
 - 16.22.7.5 Herbicide use (if applicable) is approved and properly documented
- 16.22.8 GROUND COVER MATERIALS (SEASHELLS, PINE NEEDLES)
 - 16.22.8.1 Coverage is uniform and meets design depth standards
 - 16.22.8.2 No large bare or eroded areas present
 - 16.22.8.3 Materials are clean and free of debris or contamination
 - 16.22.8.4 Edging is neat and contained within designated beds
 - 16.22.8.5 Storm displacement is corrected promptly
- 16.22.9 DEBRIS REMOVAL
 - 16.22.9.1 All clippings, trimmings, and landscape waste removed after service
 - 16.22.9.2 No accumulation of debris in landscaped or hardscape areas
 - 16.22.9.3 Storm-related debris addressed within required timeframe
 - 16.22.9.4 Disposal complies with park and regulatory requirements
 - 16.22.9.5 Drains, walkways, and access routes are clear
- 16.22.10 SAFETY AND ENVIRONMENTAL COMPLIANCE
 - 16.22.10.1 No unsafe conditions created by Contractor activities
 - 16.22.10.2 No damage to protected natural or cultural resources
 - 16.22.10.3 Proper handling of chemicals, fuels, and equipment
 - 16.22.10.4 Work areas are safe for visitor access upon completion
 - 16.22.10.5 Required approvals obtained for restricted activities (e.g., herbicide use)
- 16.23 PERFORMANCE RATING SCALE

- 16.23.1 Acceptable: Work meets all contract requirements. Services are complete, timely, and of high quality. No deficiencies or only minor issues that do not impact function, safety, or appearance.
- 16.23.2 Marginal: Work partially meets requirements but contains deficiencies that require correction. Issues may affect appearance or minor functionality but do not pose immediate safety risks. Corrective action is required within a specified timeframe.
- 16.23.3 Unacceptable: Work fails to meet contract requirements. Deficiencies significantly impact safety, functionality, environmental compliance, or visitor experience. Immediate corrective action is required.

16.24 DOCUMENTATION AND REPORTING

- 16.24.1 Date and time of inspection
- 16.24.2 Areas and services inspected
- 16.24.3 Findings and assigned ratings
- 16.24.4 Description of deficiencies, if any
- 16.24.5 Photographic evidence, when applicable
- 16.24.6 Required corrective actions and timelines

16.25 ROLES AND RESPONSIBILITIES

- 16.25.1 Inspector (COR or Designee): Conducts inspections using approved methods. Documents findings and assigns performance ratings. Communicates deficiencies and required corrective actions. Verifies completion of corrective actions
- 16.25.2 Contractor: Performs all services in accordance with contract requirements. Conducts internal quality control to ensure compliance prior to Government inspection. Responds promptly to identified deficiencies and completes corrective actions within required timeframes. Maintains and submits accurate service logs and documentation.
- 16.25.3 Facility Manager: Provides overall oversight of site conditions and performance expectations. Coordinates with the COR and Contractor on scheduling, priorities, and site access. Assists in identifying recurring issues or performance trends. Supports resolution of operational conflicts or site-specific concerns

17.0 ACCEPTANCE

- 17.1 Workmanship shall be of an acceptable quality such as would be found in a business office visited by the public and meet the acceptable quality level (AQL) listed *Appendix 2: Acceptable Quality Level*.

18.0 SAFETY

- 18.1 Before onsite work begins the contractor must submit a site/project-specific written safety and accident prevention program containing the following:
 - 18.1.1 Name of supervisor responsible for carrying out the program.
 - 18.1.2 Site-specific information including emergency response contact information and emergency response protocols.
 - 18.1.3 Provide and submit a safety plan outlining your safety program specific to this site.
 - 18.1.4 Outline each phase of work, the hazards associated with each major phase, and the methods proposed to ensure property protection and safety of the

public, NPS personnel, and contractor's employees.

18.1.5 Hazardous materials (HAZMAT) to be used:

18.1.5.1 Copies of Safety Data Sheets (SDS) must be provided to the COR

18.1.5.2 Proper storage of hazmat

18.1.6 Personal Protective Equipment (PPE)

18.1.7 Safety meeting schedule.

18.2 The contractor should provide a safe and healthy workspace for all employees while on the NPS site.

18.3 The contractor shall follow all Occupational Safety and Health Administration (OSHA) requirements, Environmental Protection Agency (EPA), Federal, State, and local safety and health requirements.

18.4 The contractor shall report all accidents to the Contracting Officer or Contract Specialist assigned to the contract immediately and assist the Contracting personnel and other officials as requested in the investigation of the accident. Accidents that occur outside of the allowed maintenance area, and cause damage to natural resources or museum collections shall be reported.

18.5 The contractor shall provide a level of public safety commensurate with exposure at a NPS worksite.

18.6 The contractor shall comply in rectifying all unsafe or unhealthful conditions called to their attention by the Contracting Officer.

18.7 Job safety is the responsibility of the Contractor. The contractor shall allow for informal and formal, announced, and unannounced safety inspections by the COR, NPS Construction Inspector, and/or appropriate Safety Officer at the worksite.

19.0 FIRE PREVENTION AND CONSERVATION OF UTILITIES

19.1 The Contractor shall, at all times, keep the janitor closets neat, clean, and free from odors and fumes. All chemical and combustible items shall be stored in proper containers along with an inventory sheet and their SDS sheets.

19.2 Upon completion of work in each building, the Contractor shall ensure that all lights are off, and that smoldering, smoking, or burning materials are not left in ash containers or trash receptacles, and all windows and entrance doors are closed and locked, with exception of the south side downstairs for visitors to gain access to the 24-hours restrooms.

19.3 All trash shall be placed in the dumpsters and not stored in janitor closets.

19.4 There are no public areas designated as smoking areas. Smoking is prohibited inside all Federal buildings and must occur at least 25 feet away from the building and entrance to any facility. The breezeway and roof overhang are included as part of the facility, and smoking is prohibited in these areas.

20.0 SECURITY

The Contractor is responsible for ensuring security of Government property, buildings, equipment, materials, records, and data against unauthorized access, loss, or damage during the performance this contract.

20.1 BUILDING SECURITY

20.1.1 The Contractor shall announce their arrival and departure to Government employees who may be occupying the building after normal working hours and shall ensure all exit doors remain closed and locked at all times during the performance of services unless the Contractor is using the door and remains in

sight of the door. Only the Contractor's employees are allowed in the building or on the job site during the performance of services. The Contractor shall secure all contractor-owned equipment and supplies in the closets provided prior to leaving the premises or take them with them at the end of the day.

20.1.2 The Contractor shall not attempt to reconnect or re-plug any computer wiring disconnected or disturbed during the performance of this contract. The Contractor shall provide written notification to the COR within one duty day if any computer equipment is accidentally disconnected.

20.1.3 The Contractor shall not disturb papers or equipment on desks or bulletin boards, open drawers or cabinets, use computers or faxes, or use telephones provided for Government use, except in the case of an emergency.

20.2 KEYS

20.2.1 The Contractor will establish and implement methods of ensuring that all keys issued by the Government are kept secure in the Contractor's possession and are not used by unauthorized persons. No keys issued by the Government are to be duplicated.

20.2.2 The Contractor will be required to reimburse the Government for replacement of locks or re-keying as a result of Contractor loss of keys. In the event issued keys are lost or duplicated, the Government will replace all locks and keys for that system at the Contractor's expense.

20.2.3 Contractor will report the occurrence of a lost key in writing to the CO and the COR no later than the next duty day.

20.2.4 It is the responsibility of the Contractor to prohibit the use of keys issued by the Government by any persons other than the Contractor's employees. It is also the responsibility of the Contractor to prohibit the opening of locked areas by Contractor to permit entrance of persons other than Contractor's employees engaged in the performance of assigned work in those areas.

20.3 CONFIDENTIALITY

20.3.1 The information developed in this Statement of Work is the property of the United States Government and shall be kept in strict confidence. Proprietary or copyrighted material may not be included into the contract unless otherwise approved by the Contracting Officer.

21.0 CIRCUMSTANCES TO BE REPORTED

21.1 The Contractor will report to the COR any circumstances of needed repairs of the facility or unusual soiling of an area which may affect the performance of the work and create unhealthy or hazardous conditions.

21.2 The Contractor will notify **Park Dispatch** at **305-242-7740** of any instances of fire, accidents, vandalism, attempted break-ins, signs of attempted break-ins, or suspicious persons – or any otherwise suspicious activities.

22.0 LOST AND FOUND PROPERTY

22.1 It is the responsibility of the Contractor to ensure all articles of possible personal or monetary value found by the Contractor are turned in to the COR.

23.0 UNFORESEEN BUILDING CLOSURES

When an unforeseen building closure occurs on a regularly scheduled day of work, the Government shall have the following options:

- 23.1 To require the Contractor to perform work necessary to sustain operations on the following normal duty day.
- 23.2 To forego the work and reduce payment due to the Contractor accordingly for work not performed.

24.0 SUBCONTRACTING

The Government reserves the right to approve or disapprove any subcontractors proposed by the Contractor. The Contractor must obtain written approval from both the Contracting Officer (CO) and the Contracting Officer's Representative (COR) prior to entering into any subcontract agreements. Following award, any request for subcontractor approval must be submitted in writing and must include a detailed description of the specific work to be performed by the subcontractor. During the solicitation phase, offerors are required to identify all proposed subcontractors in their offer for Government review and approval prior to award.

25.0 TRAVEL

The contractor shall be responsible for all travel related expenses for this project, including mobilization of equipment, tools, materials, manpower, lodging, meals, and per diem.

26.0 SPECIAL MATERIAL OR OTHER UNIQUE REQUIREMENTS

- 26.1 Smoking is prohibited inside any government-owned facility and is not permitted within twenty-five (25) feet of any facility entrance or exit points.
- 26.2 Firearms are not permitted inside any government facility.
- 26.3 Responsibility regarding existing structures, utilities, existing plant material, and other landscape features:
 - 26.3.1 The Contractor will be held responsible for any damages to, and for maintenance and protection of existing structures, and utilities.
 - 26.3.2 The Contractor shall patch, repair or replace portions of sidewalks, curbs, gutters, streets, manholes, and the like that are damaged in connection with work under this contract or as a result of operations thereunder.
 - 26.3.2.1 Materials and methods shall conform to the current standards for the area damaged, match existing on-site materials, shall meet the approval of all cognizant officials and the COR.
 - 26.3.2.2 The vendor shall make all transitions to damaged areas smooth, satisfactory, and imperceptible transitions to existing adjacent work, and shall be performed without additional expense to the government.
- 26.4 Cleanup and Restoration:
 - 26.4.1 The Contractor will be required to furnish all labor, materials, and equipment for daily cleanup and restoration of all disturbed areas or features, which have been damaged during the course of this contract.

27.0 QUALITY ASSURANCE REQUIREMENT

- 27.1 The government will periodically evaluate the contractor's performance in accordance with this statement of work.
- 27.2 The contractor shall develop and implement procedures to identify, prevent, and ensure non-recurrence of defective services.

27.3 The Contractor shall institute a complete Quality Control Program (QCP) to ensure the requirements of this contract are provided as specified. The goal of the QCP should be to identify and correct any problems that may arise before they are identified by the COR or his/her representative. A written Quality Control Plan must be submitted to the Government at least 10 days prior to commencement of work and will be incorporated into the resultant contract. At minimum the QCP should include:

27.3.1 An inspection system, covering all services required, utilizing a comprehensive checklist to monitor contract performance.

27.3.2 A system for identifying and correcting deficiencies and a pattern of deficiencies in the quality or quantity of services provided. This shall include providing consistency and precision among contractor employees as to provide the same standard for cleaning of surfaces as required in this SOW, and what standard of clean constitutes clean and how that can be achieved on a consistent basis.

27.3.3 A file system to maintain record/documentation of inspections conducted and corrective actions taken. Documentation of inspections conducted, deficiencies identified, and corrective actions taken must be kept current and made available to the CO and COR upon request.

27.4 Additional requirements:

27.4.1 Any damages, including natural and cultural resources impacts, by the contractor will be corrected and repaired where reasonable at no additional cost to the government.

28.0 PROJECT PERSONNEL

28.1 Contract Officer or Contract Specialist: To be determined at the time of award.

28.2 Park Point of Contact and COR: To be released at the time of award.

Appendix 1: Acceptable Quality Level (AQL)

CUSTODIAL

Performance Objective: Ensure the visitor center is cleaned and maintained to a high standard to support visitor health, safety, and satisfaction. Custodial services include restrooms, public areas, offices, windows, floors, and waste disposal.

Service Item	Performance Standard	AQL	Method of Surveillance
Restroom Cleaning	Restrooms are cleaned and sanitized daily. Fixtures, floors, and surfaces are free of dirt, stains, and odors. Supplies are stocked	100% compliance during operating season; no more than 1 deviation per month during off-season	Random inspection, customer complaints
Trash Removal	All interior and exterior trash receptacles are emptied before they are full; liners replaced as needed	No more than 1 missed removal per month	Daily walkthrough, spot checks
Floor Cleaning (Hard Surfaces and Carpets)	Floors are vacuumed/swept/mopped per schedule. No visible debris or spills	95% of scheduled cleanings completed per month	Random inspection, schedule verification
Window/Glass Surface Cleaning	Interior glass is free from smudges and streaks; exterior entrance glass cleaned daily	90% of surfaces meet standard per inspection	Spot inspection
High-Touch Surface Disinfection	Door handles, railings, counters, and touchscreens are disinfected per daily schedule	100% during public health alerts; otherwise, 95% monthly compliance	Spot checks, log verification
Supply Replenishment	Toilet paper, soap, paper towels, and other supplies stocked to avoid outages	No more than 1 supply outage per month	Staff reports, user complaints
Incident Response (Spills, Hazards)	Custodial staff respond within 30 minutes to clean spills or address sanitation hazards	100% response within 30 minutes during staffed hours	Time-stamped incident log review

HVAC INSPECTION, TESTING, AND MAINTENANCE

Performance Objective: Ensure HVAC systems are inspected, tested, and maintained in a manner that maximizes operational reliability, energy efficiency, and occupant comfort, and that meets all safety and compliance standards.

Service Item	Performance Standard	AQL	Method of Surveillance
Scheduled Preventative Maintenance (PM)	Perform all PM tasks per approved schedule and manufacturer/NPS standards (e.g., belts, filters, lubrication)	100% of PM tasks completed on schedule. No more than 1 missed item per quarter per unit	Maintenance log review, random inspection
Seasonal Start-Up & Shutdown	Perform seasonal system checks (e.g., cooling in spring); ensure proper system function.	100% compliance with seasonal checklist	Spot checks, post-service review
Inspection and Testing of Controls	Thermostats, sensors, actuators, and control systems function per design specifications	95% of devices tested meet operational standards on first inspection	Functional testing, system logs
Filter Replacement	Filters replaced per schedule (e.g., monthly, quarterly); correct size, type, and installation verified	No more than 1 missed filter replacement per building per cycle	Filter change logs, visual verification
Coil and Duct Cleaning	Coils and ducts cleaned per schedule or as needed to maintain efficiency and air quality	90% of scheduled cleanings completed with satisfactory results.	Visual inspection, airflow testing
Emergency Response to System Failure	Response to HVAC outages or alarms within 2 hours during working hours (or per contract terms).	100% of responses occur within the required timeframe	Time-stamped call log review, Contractor's work order system
Documentation and Reporting	Provide completed inspection and maintenance reports within 3 business days of service	No more than 1 late or incomplete report per month	Report review, contractor submittals
Compliance with Regulatory Requirements	Maintenance adheres to American Society of Heating, Refrigerating, and Air Conditioning Engineers	100% compliance required. Any single violation constitutes unacceptable performance	Inspection, regulatory audit, third-party review

	(ASHRAE), the Environmental Protection Agency (EPA), Occupational Safety and Health Administration (OSHA), and NPS environmental/safety standards.		
--	--	--	--

ELEVATOR INSPECTIONS, TESTING, AND MAINTENANCE

Performance Objective: Ensures elevators are inspected, tested, and maintained in a safe, reliable, and code-compliant manner that minimizes downtime and ensures safe access for visitors and staff, including compliance with ABA and life-safety standards.

Service Item	Performance Standard	AQL	Method of Surveillance
Routine Preventative Maintenance (PM)	Perform inspections, lubrication, and adjustments per manufacturer and code requirements	100% of PM visits are completed on schedule; no more than 1 missed task per elevator per quarter	Maintenance logs, inspection checklist
Annual Code-Required Testing	Perform annual load test, safety test, fire recall test, and emergency phone check in accordance with ASME/ANSI	100% of required tests performed by the due date	Test reports, response time verification
Emergency Response (Entrapment/Event)	Response to elevator entrapment or operational failure within 3 hours (due to remoteness) during business hours	100% of responses within required timeframe	Incident logs, response time verification
Operational Uptime	Elevators must remain operational and available for use during facility hours, except during scheduled downtime	95% operational uptime per month; no more than 1 unscheduled outage exceeding 4 hours per month	Downtime logs, maintenance tickets
Safety Devices and Controls Functionality	Door sensors, interlocks, breaks, alarms, and emergency communications function as designed	100% compliance with safety checks; any deficiency corrected within 24 hours or unit taken out of service	Function tests, maintenance logs
Cleanliness and	Mechanical rooms,	No more than 1	Visual inspection,

Condition	hoist ways, and pits are clean, dry, and free of obstructions or debris.	deficiency noted per quarterly inspection	safety audit
Documentation and Service Reporting	Submit complete reports after each visit, including deficiencies, parts used, and code compliance status	No more than 1 late or incomplete report per quarter	Report review, contract file
Regulatory and Code Compliance	Services meet all local, state, federal, and ASME A17.1 (Safety Code for Elevators and Escalators) requirements	100% compliance required. Any single violation constitutes unacceptable performance	Third-party inspections, certification review

LANDSCAPING SERVICES

GROUNDS MAINTENANCE

Performance Objectives: Maintain a safe, resilient, and aesthetically pleasing landscape while accounting for coastal conditions such as salt exposure, high winds, sandy soils, and periodic storm events.

Service Item	Performance Standard	AQL	Method of Surveillance
Plant Health in Coastal Conditions	Plants are healthy, showing minimal salt stress, wind damage, or drought impact	90% of plants in healthy condition; no widespread die-off due to neglect	COR inspections; seasonal plant health assessments
Irrigation Effectiveness	Irrigation supports plant health and mitigates salt buildup; system is functional despite corrosive conditions	95% system functionality; no prolonged outages (>48 hrs)	Inspection of irrigation system; review of logs
Trimming & Wind Resilience	Vegetation is properly trimmed and shaped to withstand coastal winds and not obstruct facilities	95% compliance with appearance and clearance standards	Visual inspections; random sampling
Weed Control	Landscaped areas remain substantially weed-free without causing erosion	90% of areas free of visible weeds	Random inspections; complaint-based review
Ground Cover Stability	Seashells and pine needles maintain coverage despite	90% coverage maintained; no significant bare	Visual inspection; comparison to baseline

	wind/rain displacement	areas	
Storm Debris & Recovery	Minor storm debris is removed and areas restored within defined timeframe (typically 72 hours post-event)	95% compliance with response timeframe	COR verification; post-storm inspections
Site Cleanliness	Grounds are free of debris and hazards following each service	100% compliance	Spot checks; COR observation
Resource Protection	No damage to dunes, native vegetation, or protected resources	Zero incidents	COR monitoring; incident reports
Documentation Accuracy	Logs accurately reflect work and coastal conditions	95% accuracy	COR review; cross-check with field conditions

PRESSURE WASHING

Performance Objective: Work shall remove dirt, mildew, algae, stains, salt deposits, and other contaminants without damaging surfaces.

Service Item	Performance Standard	AQL	Method of Surveillance
Cleanliness and Condition	Complete removal of visible contaminants; no surface damage; uniform appearance across all cleaned areas	Re-cleaning will be required at no additional cost is standards are not met	Visual inspection

PARKING LOT STRIPING

Performance Objective: Lines shall be straight, crisp, and uniform in width; free of overspray, drips, or irregular edges.

Service Item	Performance Standard	AQL	Method of Surveillance
Cleanliness and Condition	Striping is accurate in layout and alignment, consistent line width and color, and proper adhesion to pavement. Site is clean and ready for use; all markings are fully cured and	Re-striping will be required at no additional cost is standards are not met	Visual inspection

	operational.		
Regulatory and Code Compliance	Services meet all local, state, federal, ADA, and MUTCD standards and requirements	100% compliance required. Any single violation constitutes unacceptable performance	Visual inspection


SIGNAGE INSPECTION, MAINTENANCE & REPAIR

Performance Objective: Signs shall be clean, legible, and free of graffiti. straight, and properly mounted.

Service Item	Performance Standard	AQL	Method of Surveillance
Annual Inspection Completion	All signage assets are inspected and documented annually in accordance with Section 14	100% of signage inventory inspected; report submitted within 10 business days	COR review of inspection report; random field verification (minimum 10% sample)
Sign Condition – Cleanliness & Appearance	Signs are clean, legible, free of graffiti, and visually intact after maintenance	95% of signs meet cleanliness and legibility standards following annual cleaning	Inspection by COR or Maintenance Supervisor; visual checks
Structural Integrity	Sign panels, posts, and mounting systems are stable, plumb, and secure	100% of signs are structurally sound with no safety hazards	Random and complaint-based inspections; documented deficiency tracking
Protection of Resources	No damage to surrounding natural or cultural resources during work	Zero incidents of avoidable damage	COR observation; incident reports; post-work inspections

Appendix 2: Maps & Floor Plans

Everglades National Park Homestead, Florida 33034

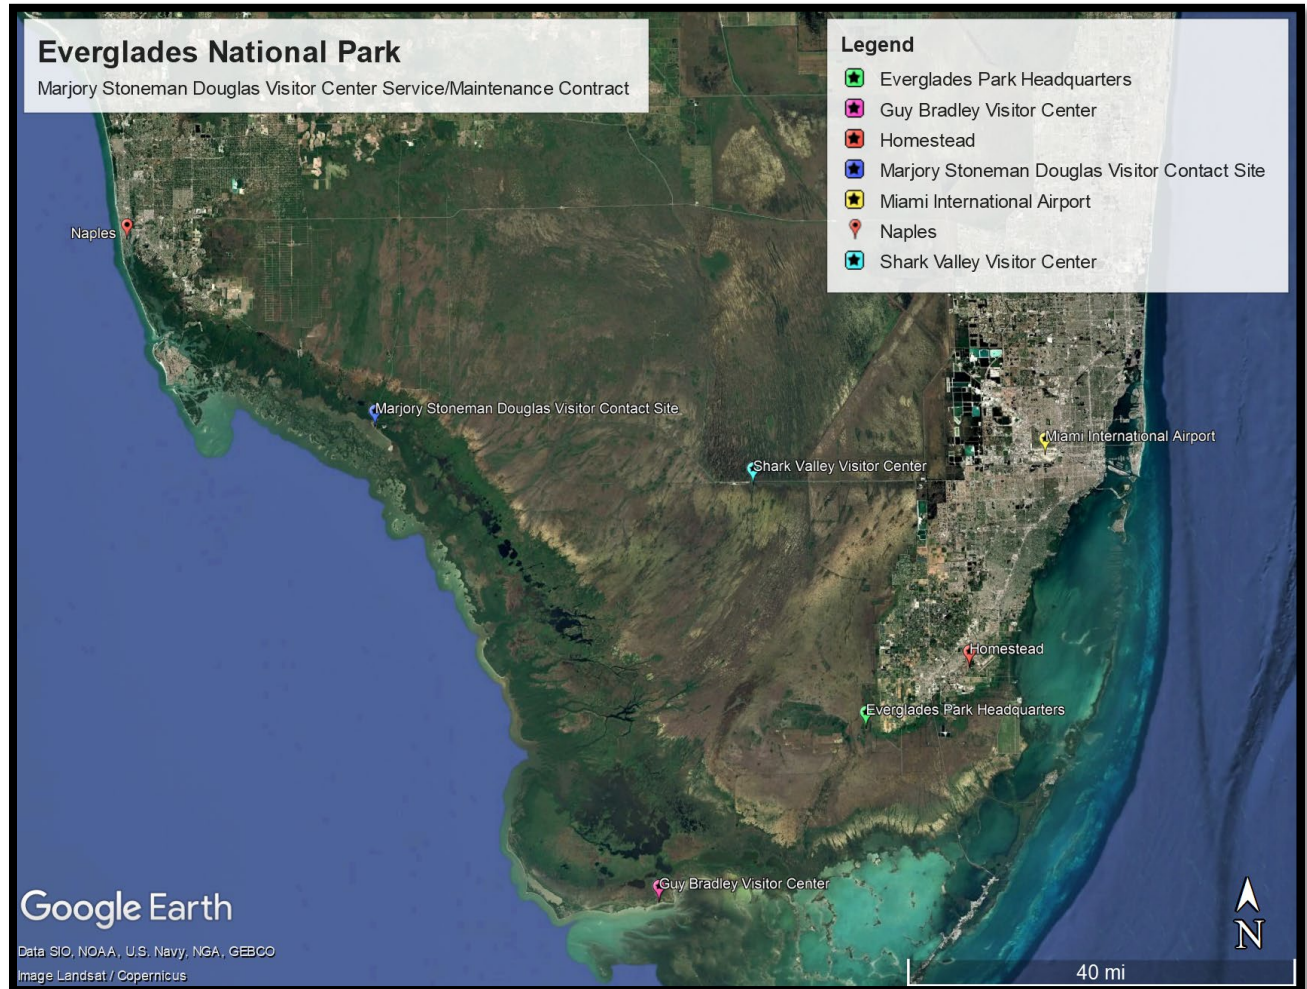

Marjory Stoneman Douglas Visitor Center

815 Oyster Bar Lane Everglades City, Florida 34139


25.845024°, -81.386145°



Marjory Stoneman Douglas Visitor Center

815 Oyster Bar Lane Everglades City, Florida 34139

Second (Main) Floor Plan

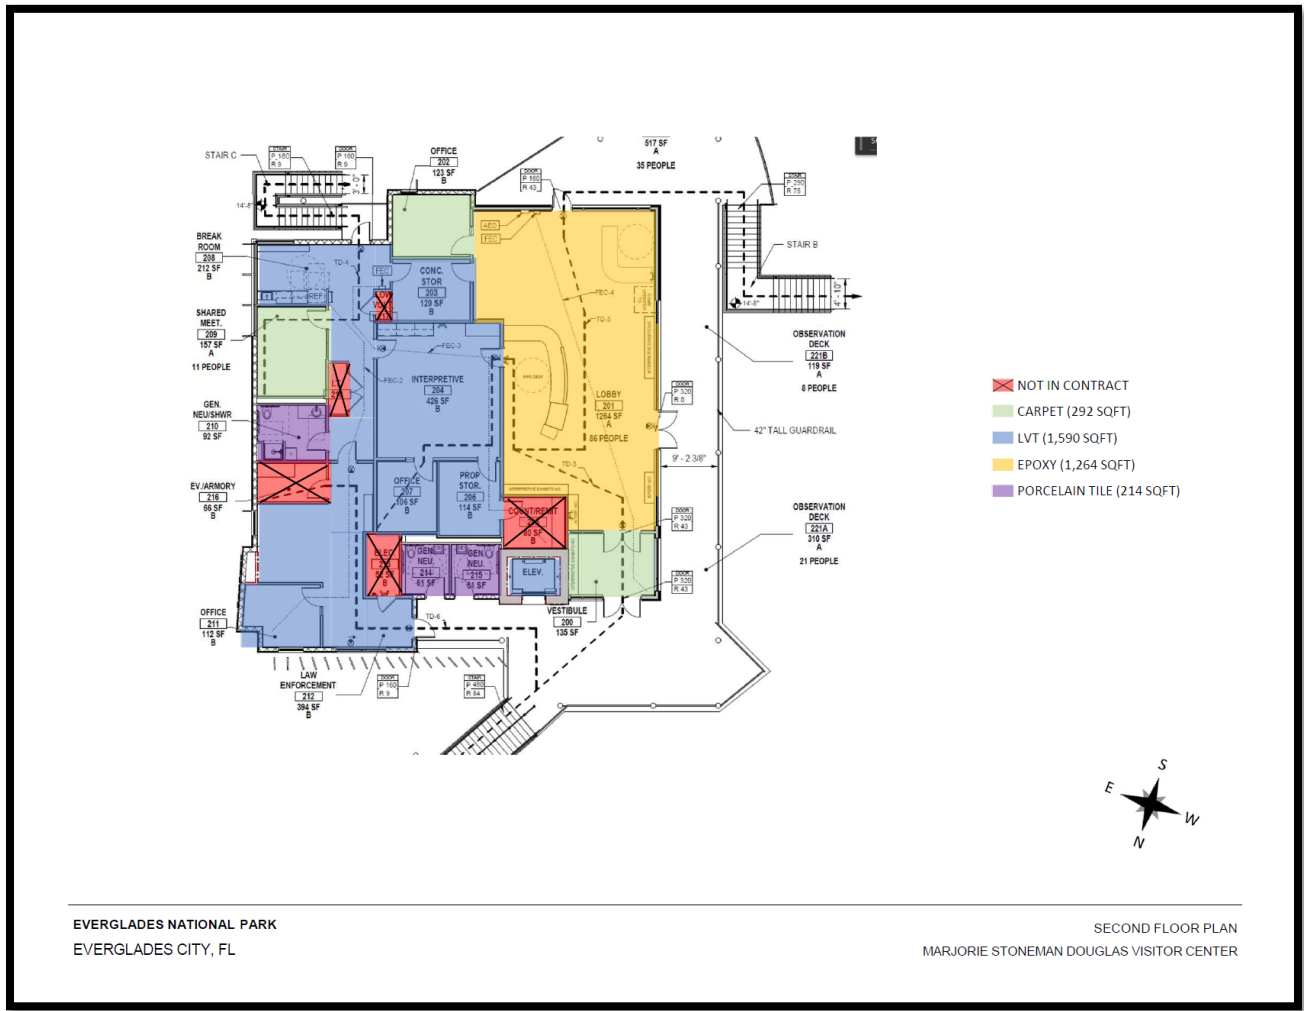

Marjory Stoneman Douglas Visitor Center

815 Oyster Bar Lane Everglades City, Florida 34139

Ground Floor Plan

